


# Accelerator Physics

## Lecture 12

### New Technologies

- Superconducting RF
- CLIC Technology
- Plasma Wakefield Accelerators

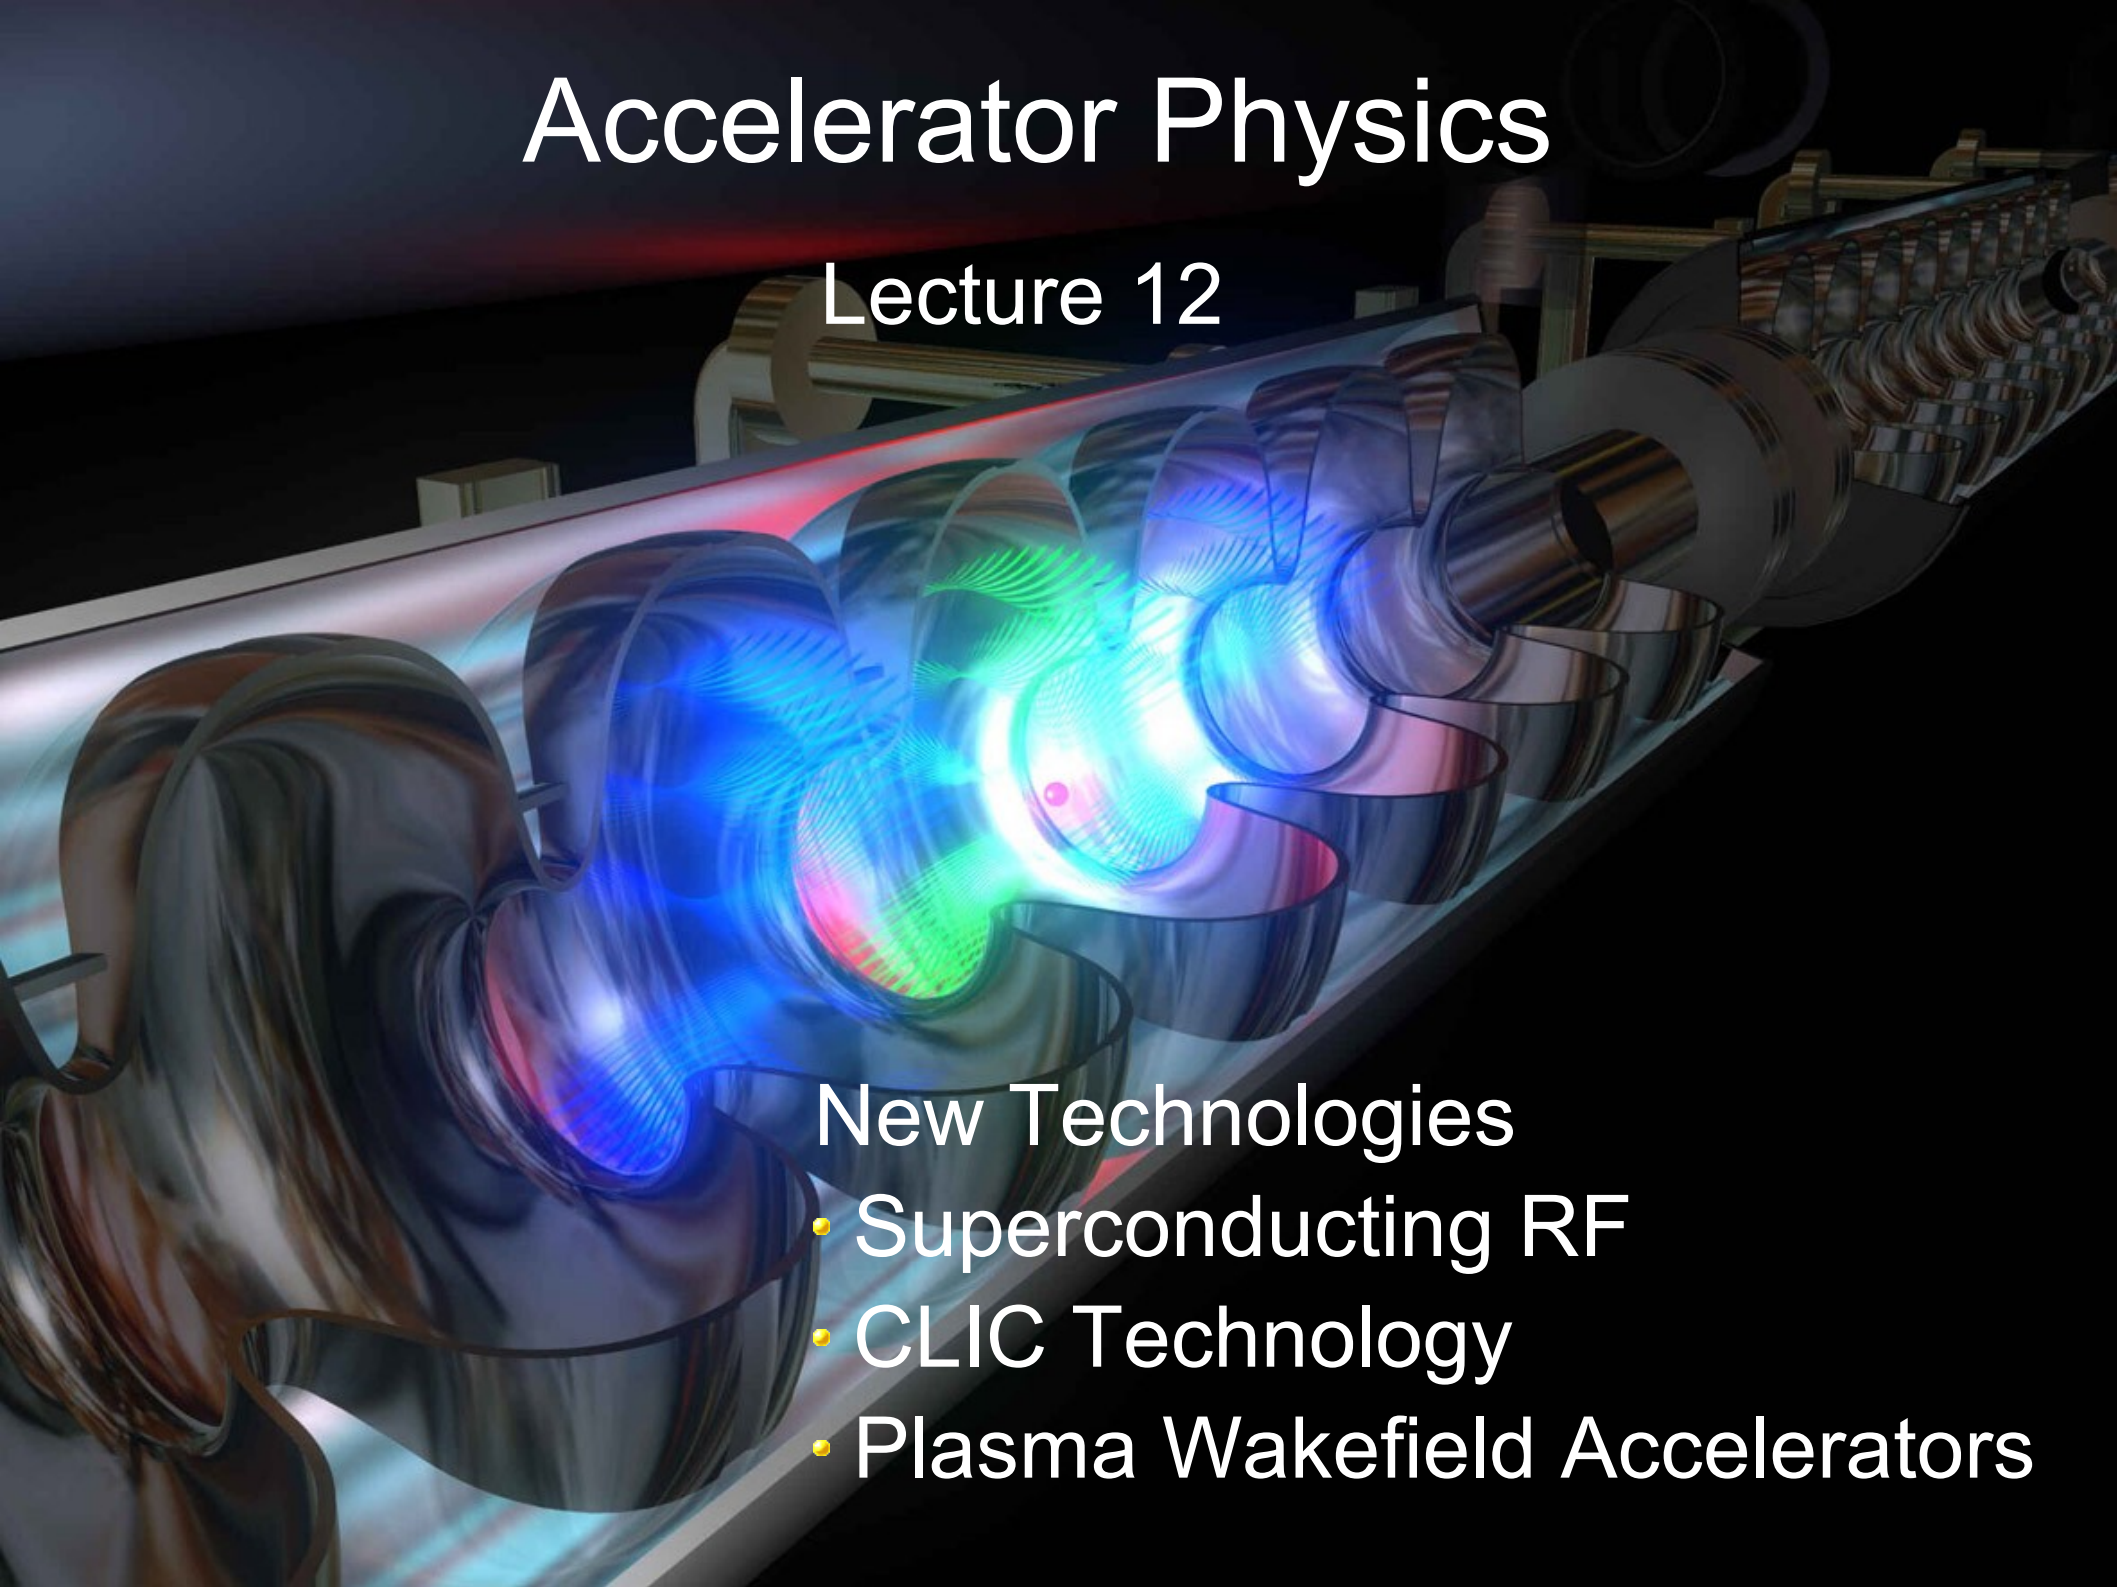


# Electron-Positron High Energy Collider

LEP:  $P \sim 100 \text{ MW}$        $\sqrt{s} = 200 \text{ GeV}$

LEPX:  $P \sim 63 \text{ GW}$        $\sqrt{s} = 1000 \text{ GeV}$

~63 nuclear plants!!!


International Linear Collider (successor of the TESLA project)

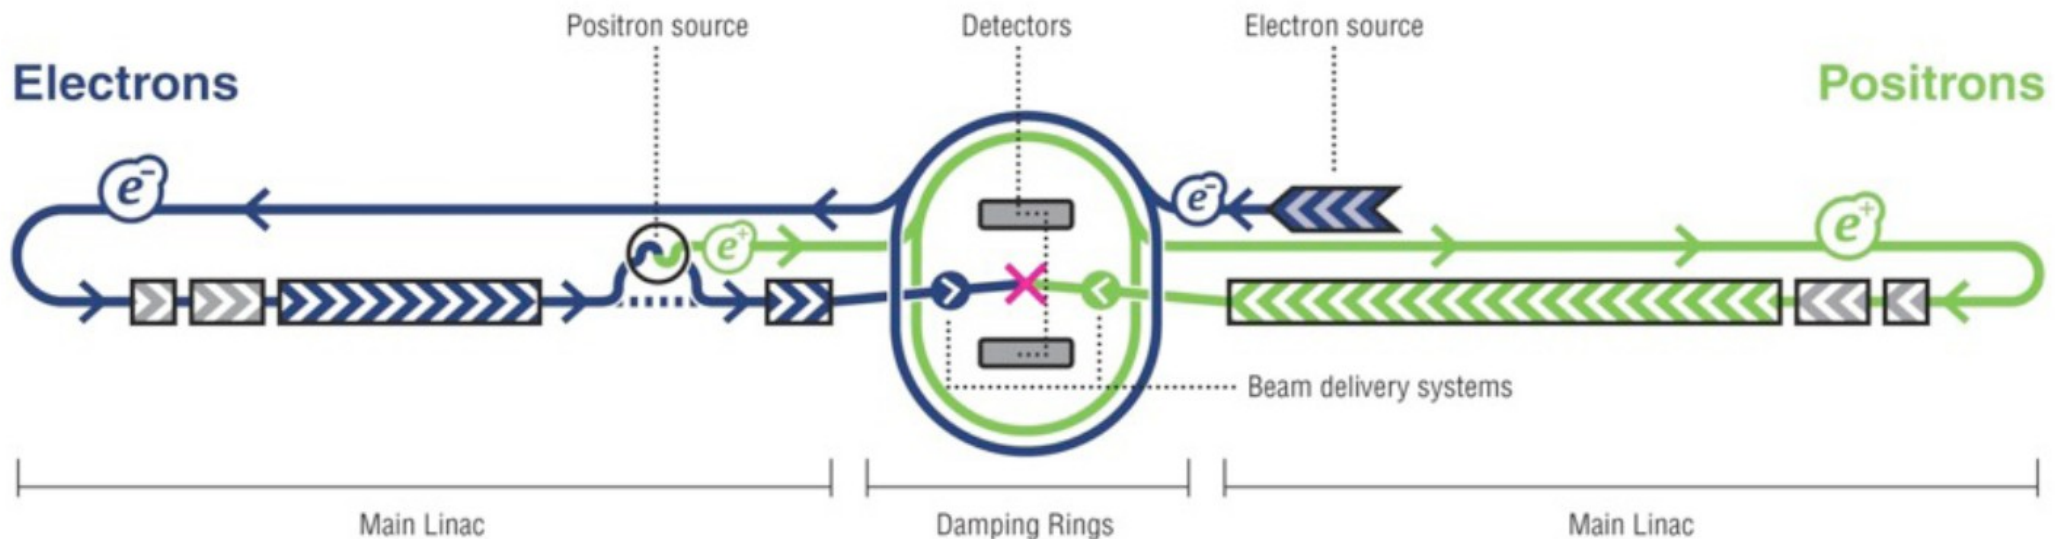

# Konzepte der Hochfrequenzbeschleunigung

- Resonator erforderlich für
  - longitudinale Komponente  $E_z$
  - Anpassung der Phasengeschwindigkeit

Resonator

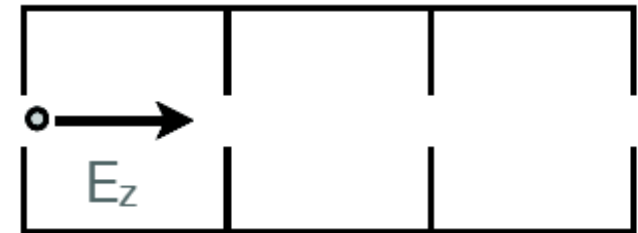


- Zwei Konzepte

- **Wanderwelle**

$$E_z = E_0 \cos(\phi)$$

- Teilchenbündel entnimmt Energie und schwächt Amplitude der Welle

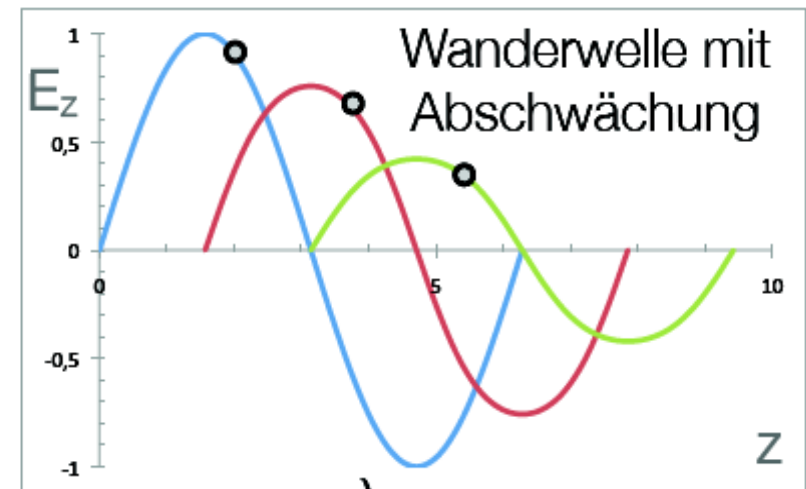


- **Stehende Welle**

$$E_z = E_0 \sin(\omega t + \phi) \sin(kz)$$


$$= E_0 \sin(kz + \phi) \sin(\omega t)$$

- Teilchenbündel wird mit dem Mittelwert des Feldes beschleunigt; Feld selbst ziemlich unberührt

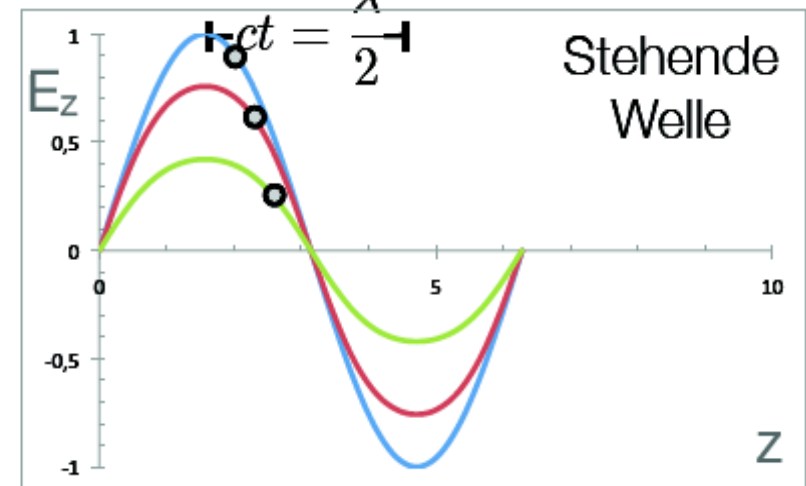


# Hochfrequenzerzeugung

- Klystron
  - Geschwindigkeitsmodulation eines Elektronenstrahls durch ein äußeres Feld resultiert in Dichtemodulation des Elektronenstrahls
  - Elektrisches Feld wird ausgekoppelt

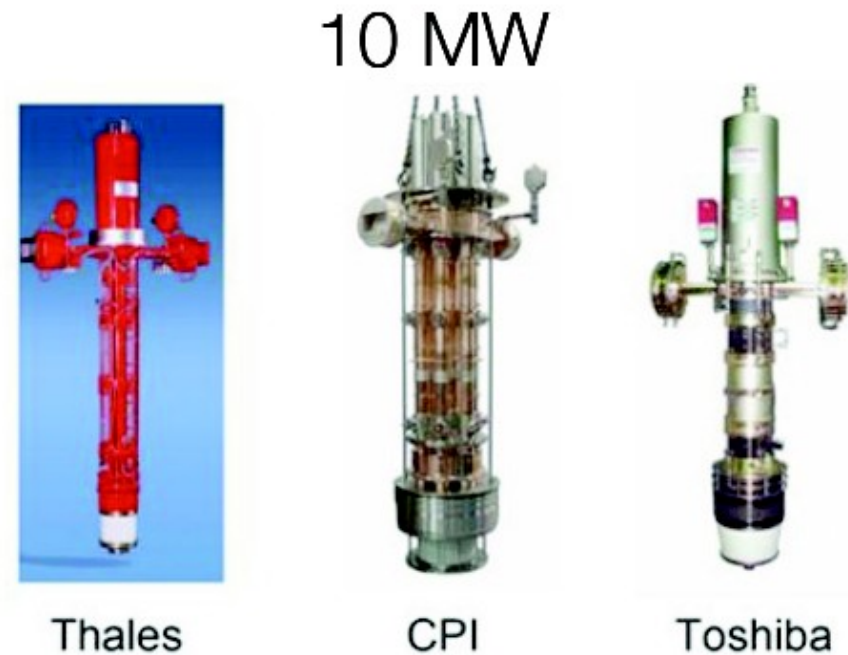

- Wakefield
  - Das Feld einer räumlich begrenzten, bewegten Ladung wird in geeigneten resonanten Strukturen ausgekoppelt

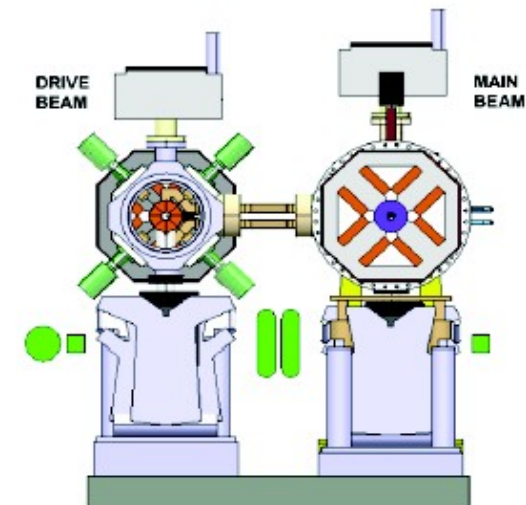

# Cavity Basics

High frequency oscillator:

$$Z^{-1} = \frac{1}{\frac{1}{i\omega C} + i\omega L + R} = \frac{\omega}{((\omega^2 - \omega_0^2)^2 + \omega^2 \Gamma^2)^{1/2}}$$

resonance frequency:

$$\omega_0^2 = \frac{1}{LC}$$

bandwidth:


$$\Delta\omega = \Gamma = R/L$$

Quality factor:

$$Q_0 = \frac{\omega_0}{\Delta\omega} = \frac{1}{R} \sqrt{\frac{L}{C}}$$

$10^4 - 10^5$  normal conducting


$> 10^9$  superconducting

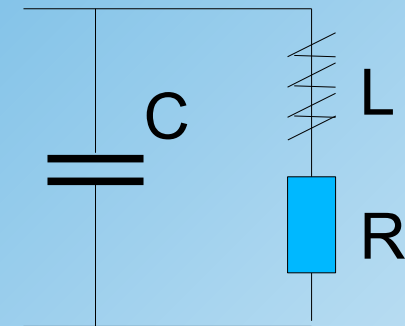

cavity circuit  
with series resistor

Ohmic resistor determines quality factor!


# Superconducting Cavity ILC (TESLA)

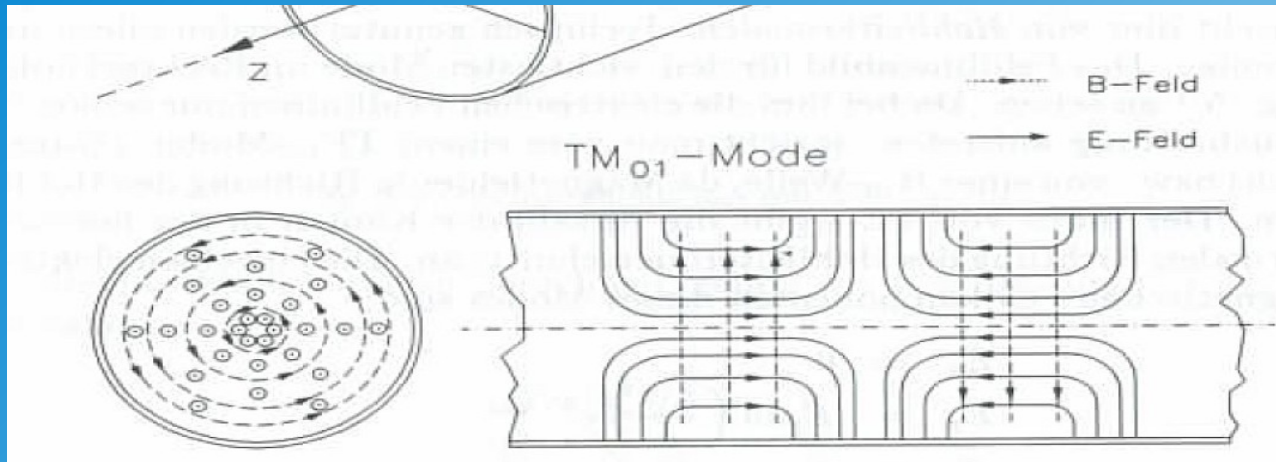

Advantage SC-RF:  
no electrical resistance!  
no power losses!




$f = 1.3 \text{ GHz}$

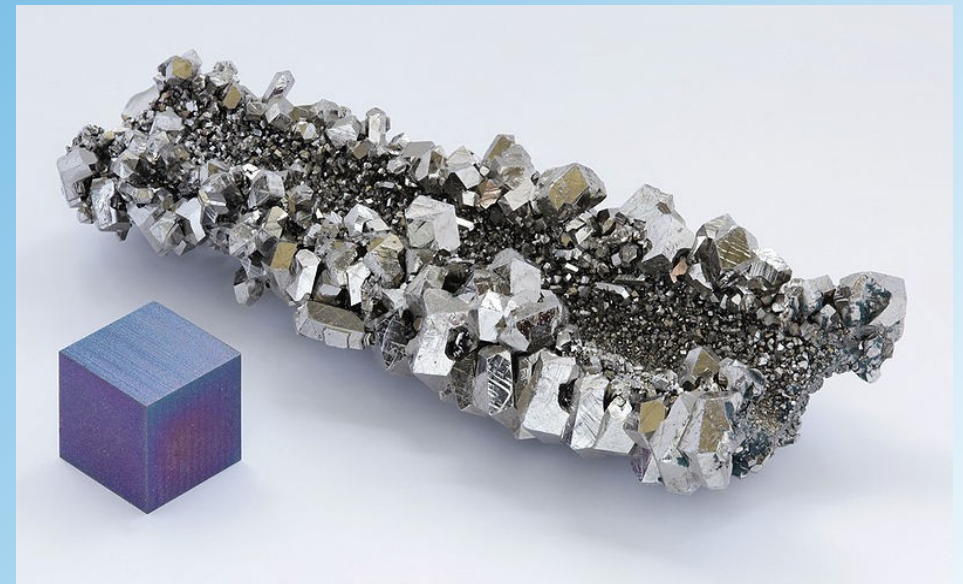

Niobium

# Superconductor

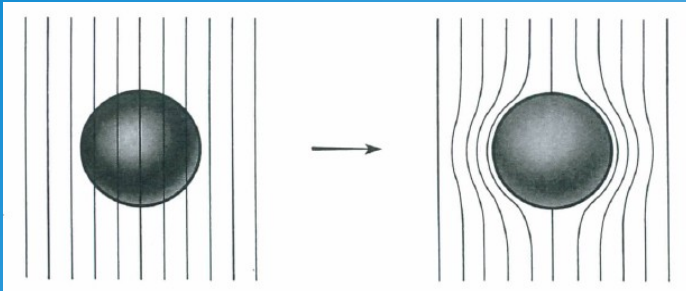

Meißner-Ochsenfeld Effect


Superconductor of first kind

Limitation:

critical magnetic field  $H_c$


$$H_c(T) \approx H_c(0) \left(1 - T^2/T_c^2\right)$$

need low temperatures!

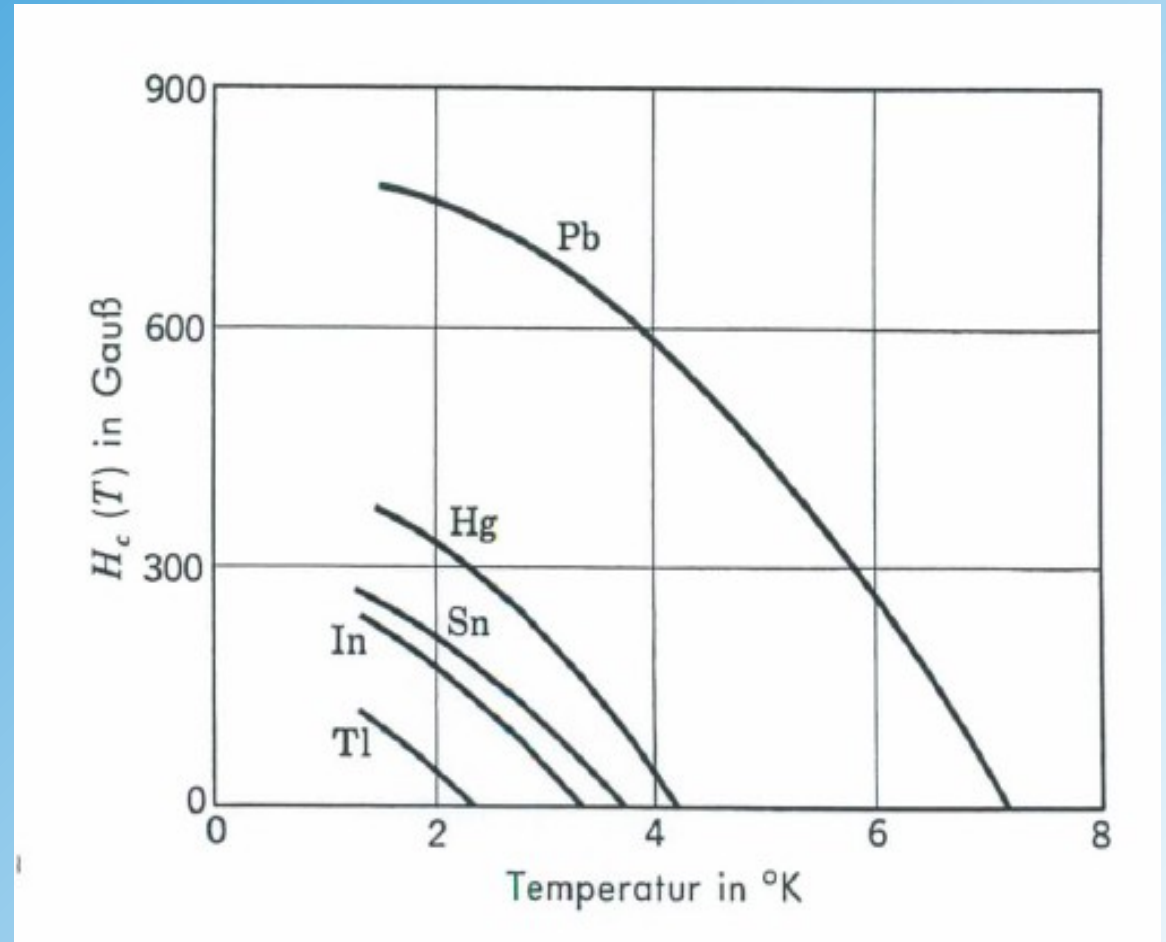


# TESLA Cavity

A superconductor in a HF field has a surface resistance  $R_s$

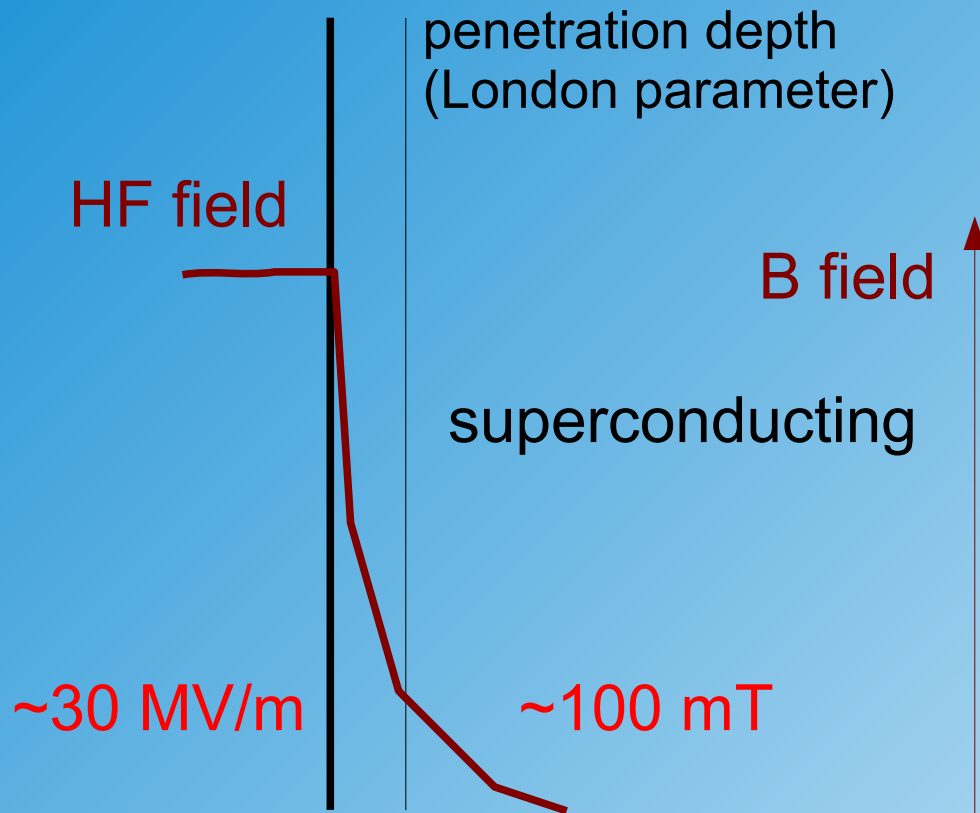

$R_s$  surface resistance

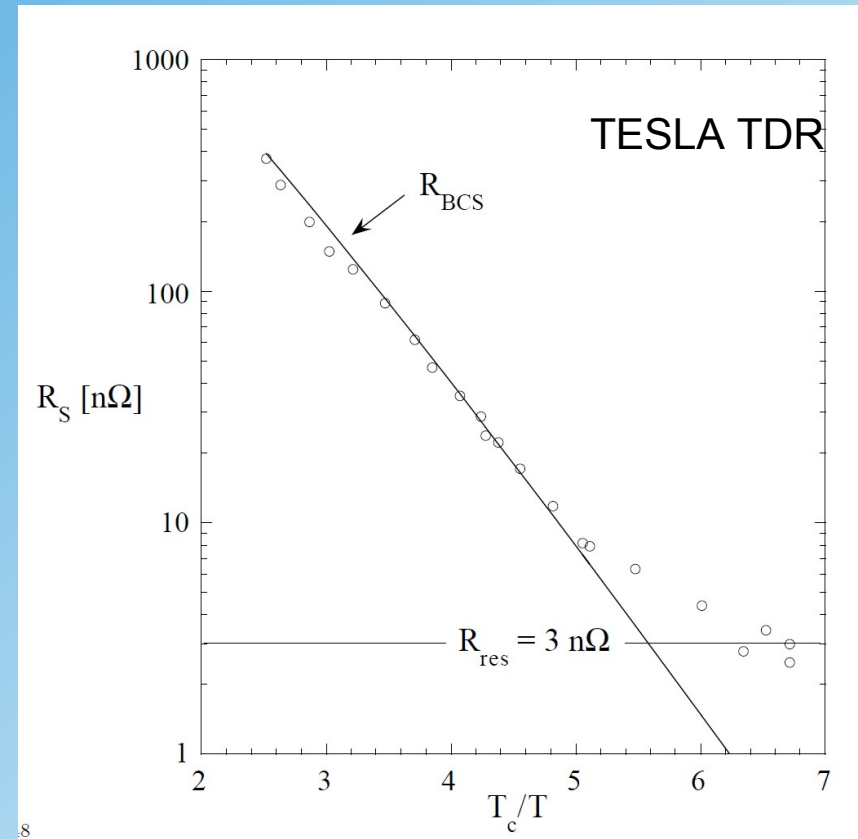

Superheating:  
for a short time (HF) magnetic field may exceed critical temperature!




# Superconducting Cavity

## Technical problems

- thermal instabilities
- field emissions

## caused by

- weld splatters
- cracks
- dust

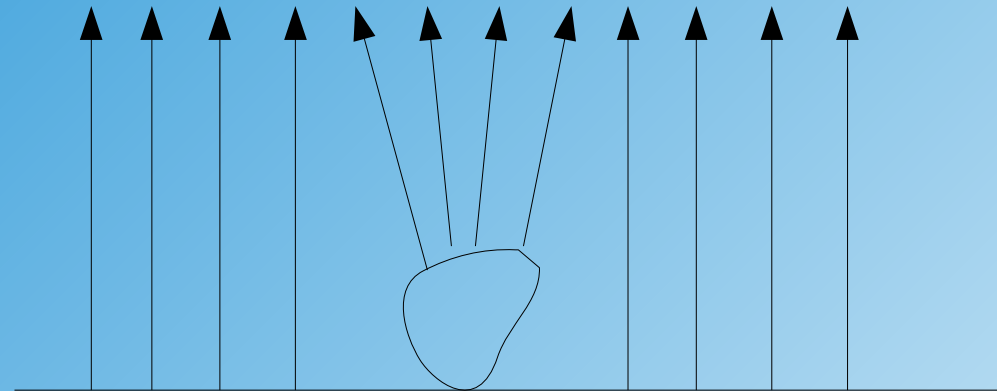

strong em. field → heating


maximum acceleration field 35-40 MV/m

Therefore very clean surface required

→ electro-polishing


# Fabrication

Material niobium  $T_c=9.2$  K  
single-crystal (no welding)  
small impurities!  
careful processing:

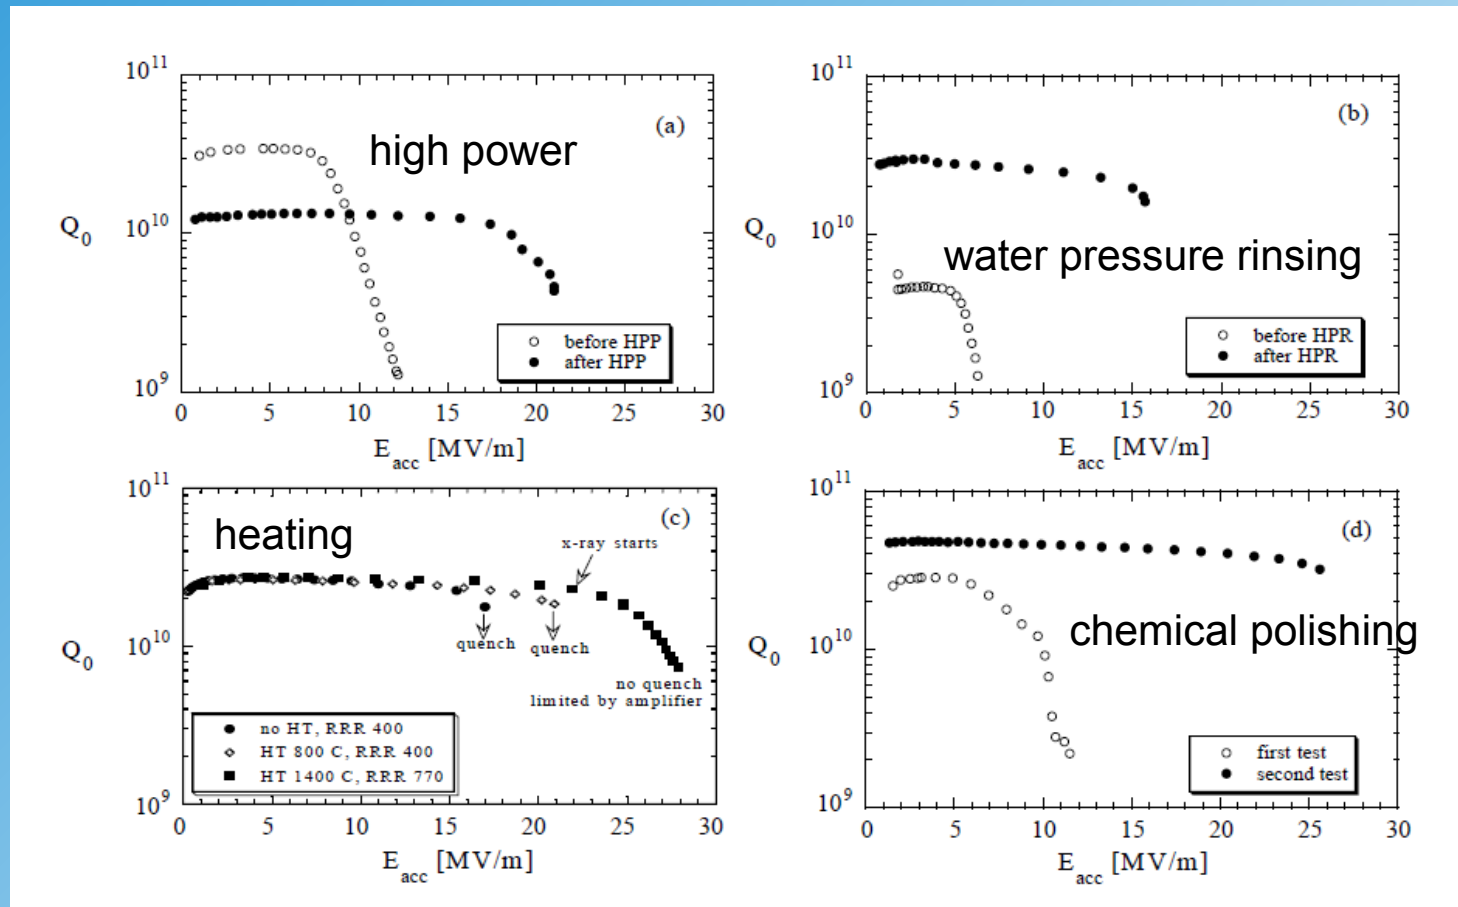


# Yield of Cavities

ILC goal: 31.5 MV/m (average)

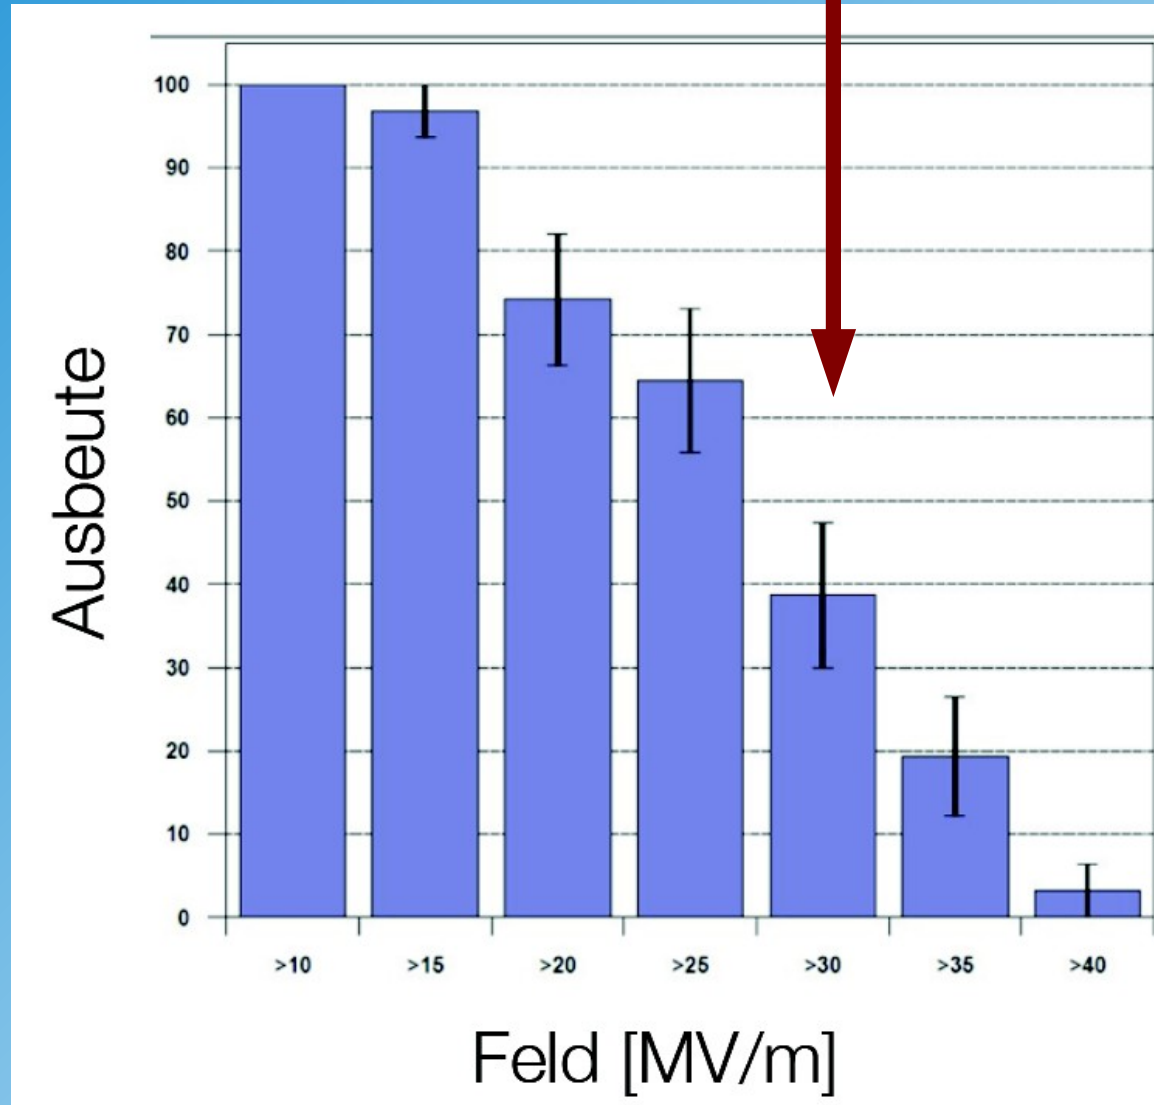


# Future Ideas

Coating of surface

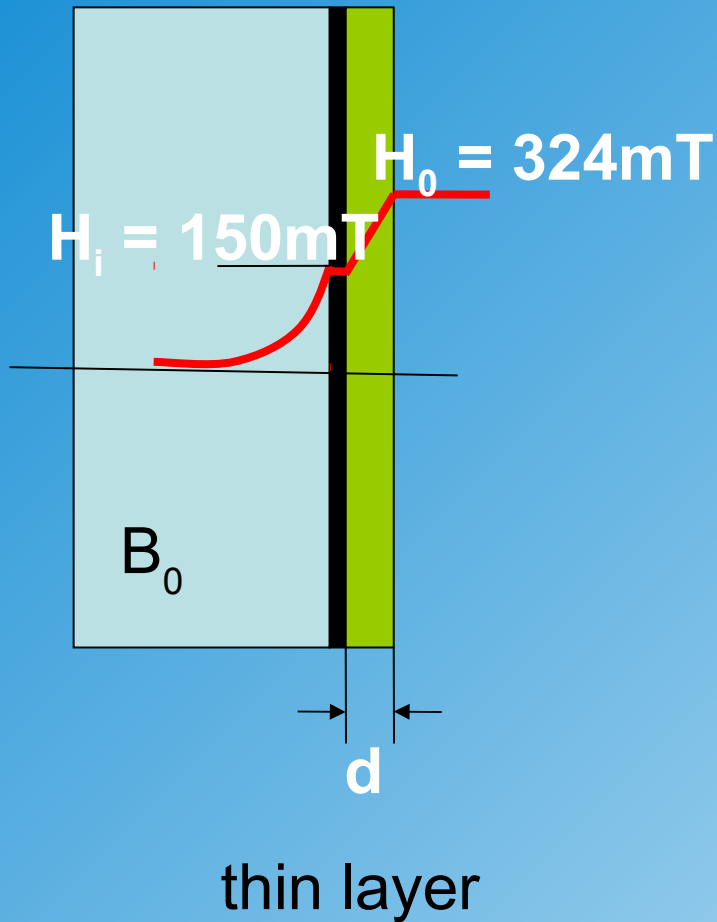

coating reduces magnetic field in superconductor and surface resistance (A. Gurevich)

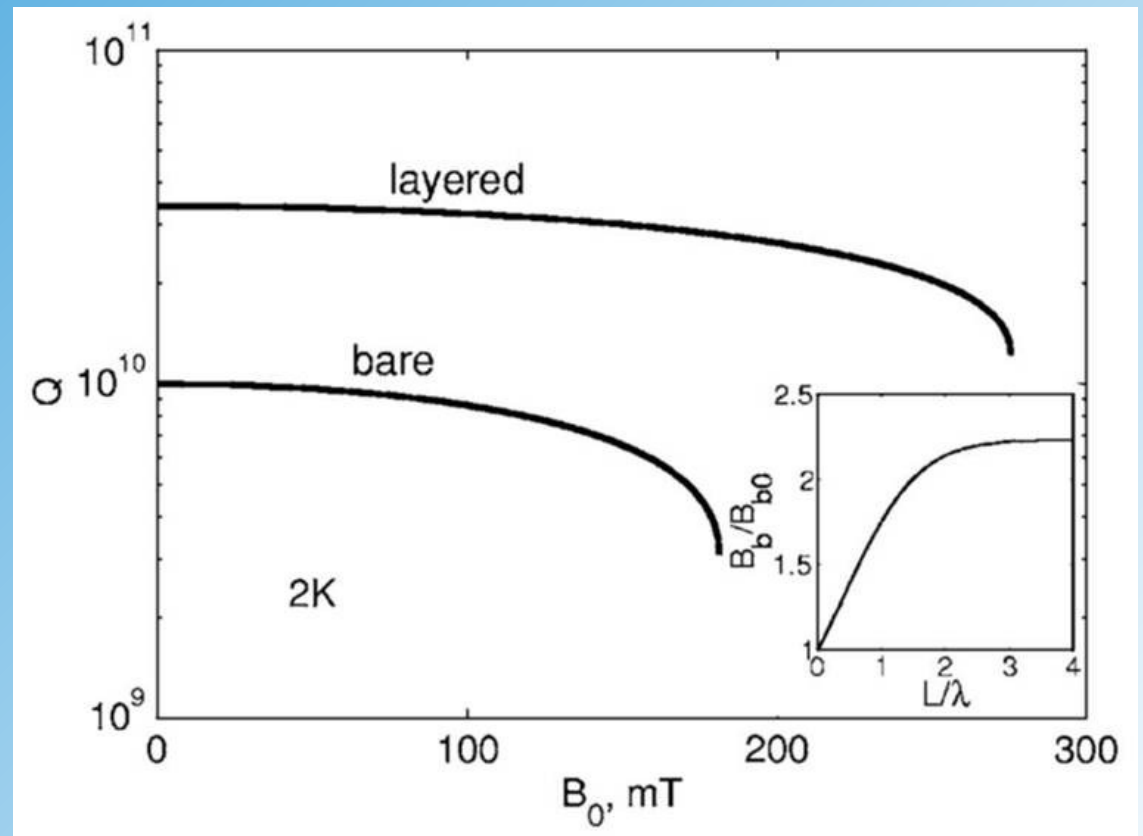



figures from Elmar Vogel (DESY)

# Superconducting Materials

Task: Find superconductor with high  $H_C$

Problem:

Most “high temperature” superconductors are of second kind (incomplete Meißner effect → flux tubes)

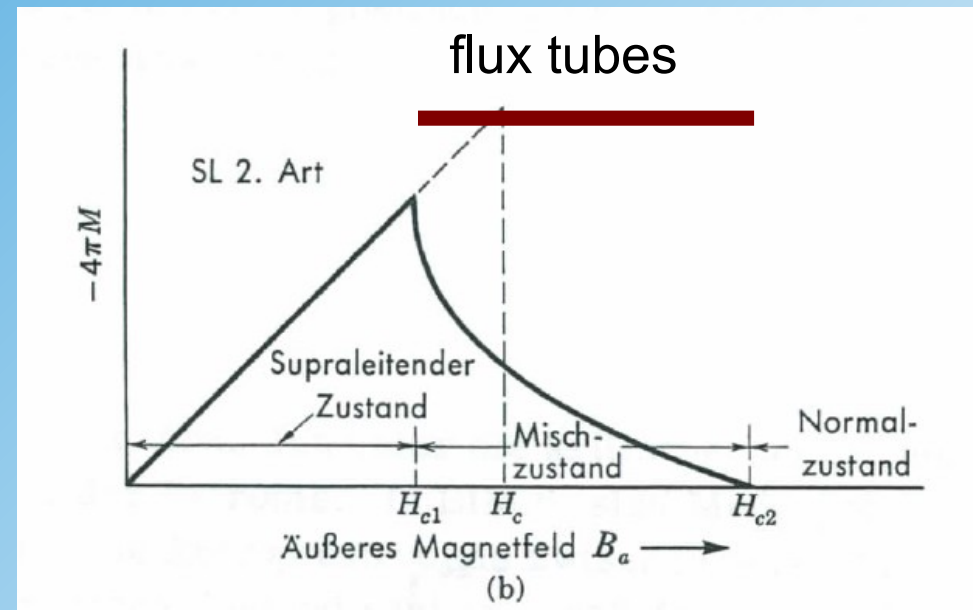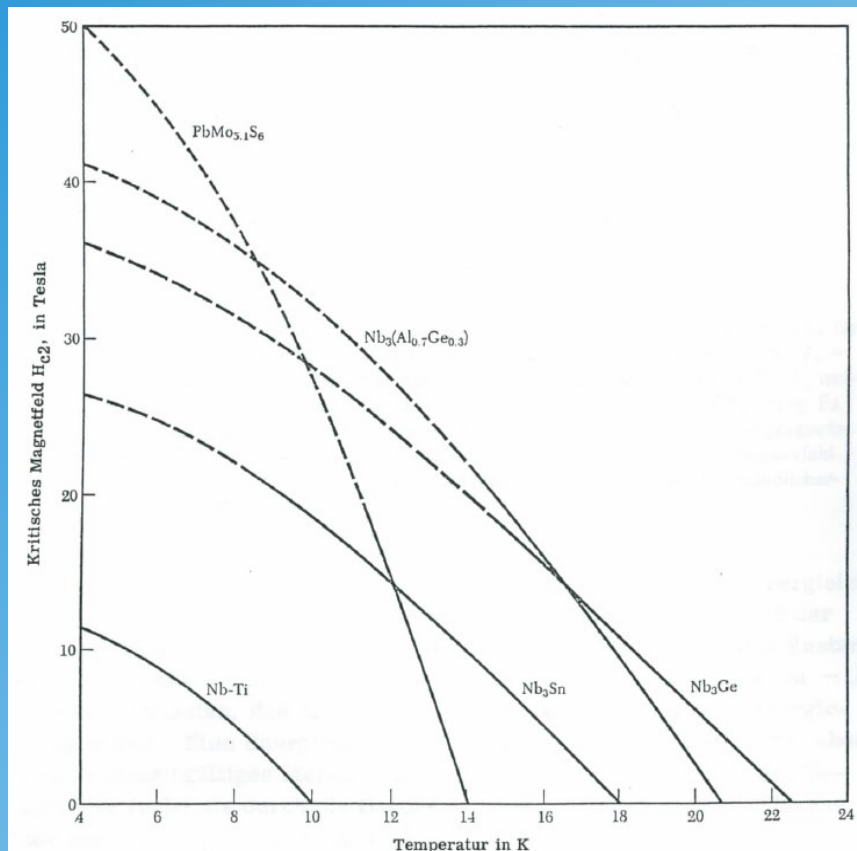

HF: walking flux tubes absorb energy!

→ need SC of 1<sup>st</sup> kind!

# CLIC



## The wakefield accelerator




heavy boat → fast runner

# CLIC Prinzipien

- Hoher Gradient  $>100$  MV/m
- Kompakter Collider;  
Gesamtlänge  $< 50$  km für 3 TeV
- Beschleunigung in normalleitenden  
Strukturen @ 12 GHz
- Beschleunigungsfeld von einem parallel  
laufenden Hochstromstrahl ausgekoppelt.
- Elektrisches Feld nur bei Bedarf erzeugt
- Hochstromstrahl wird sehr effizient generiert

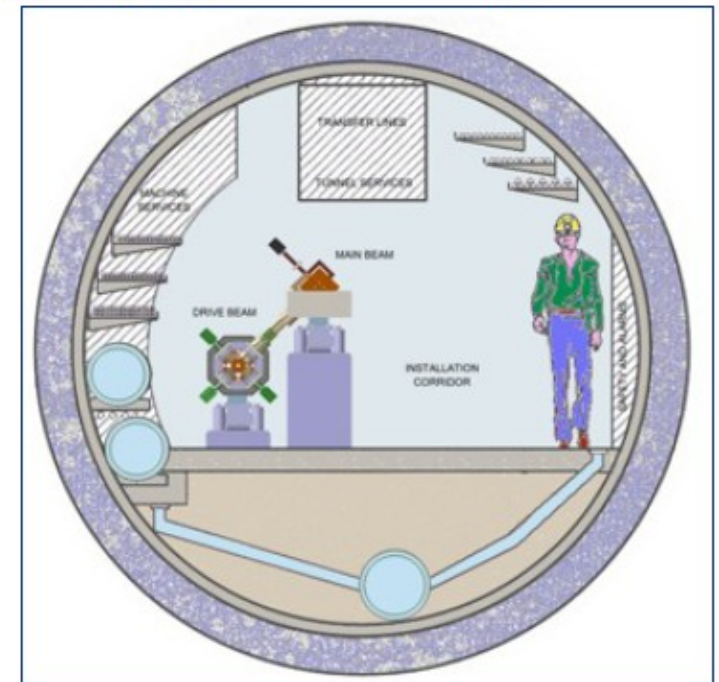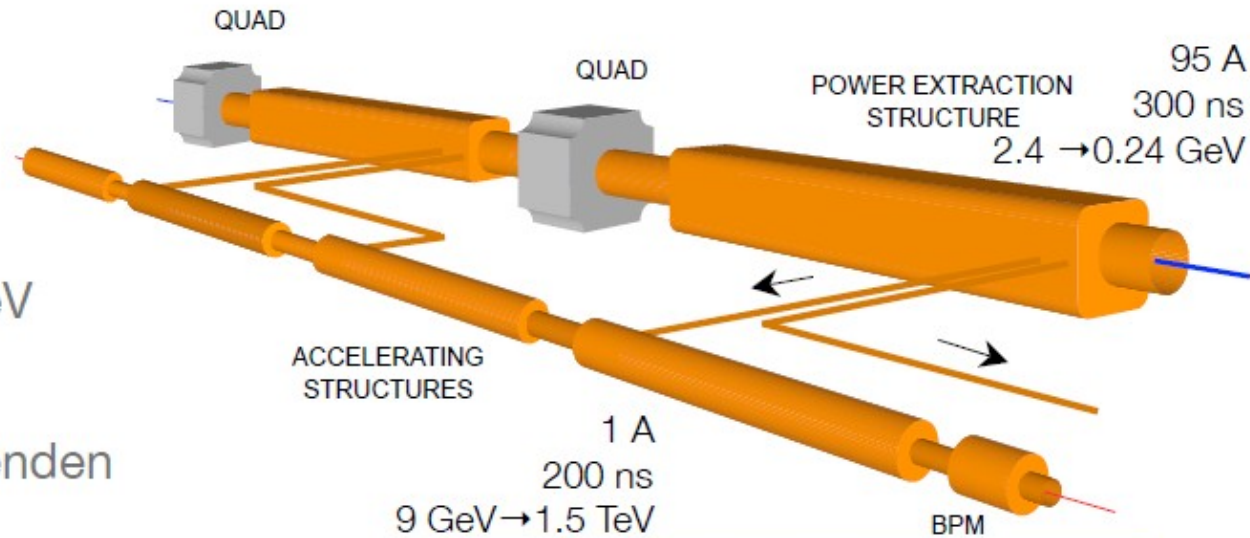




# CLIC Layout für 3 TeV

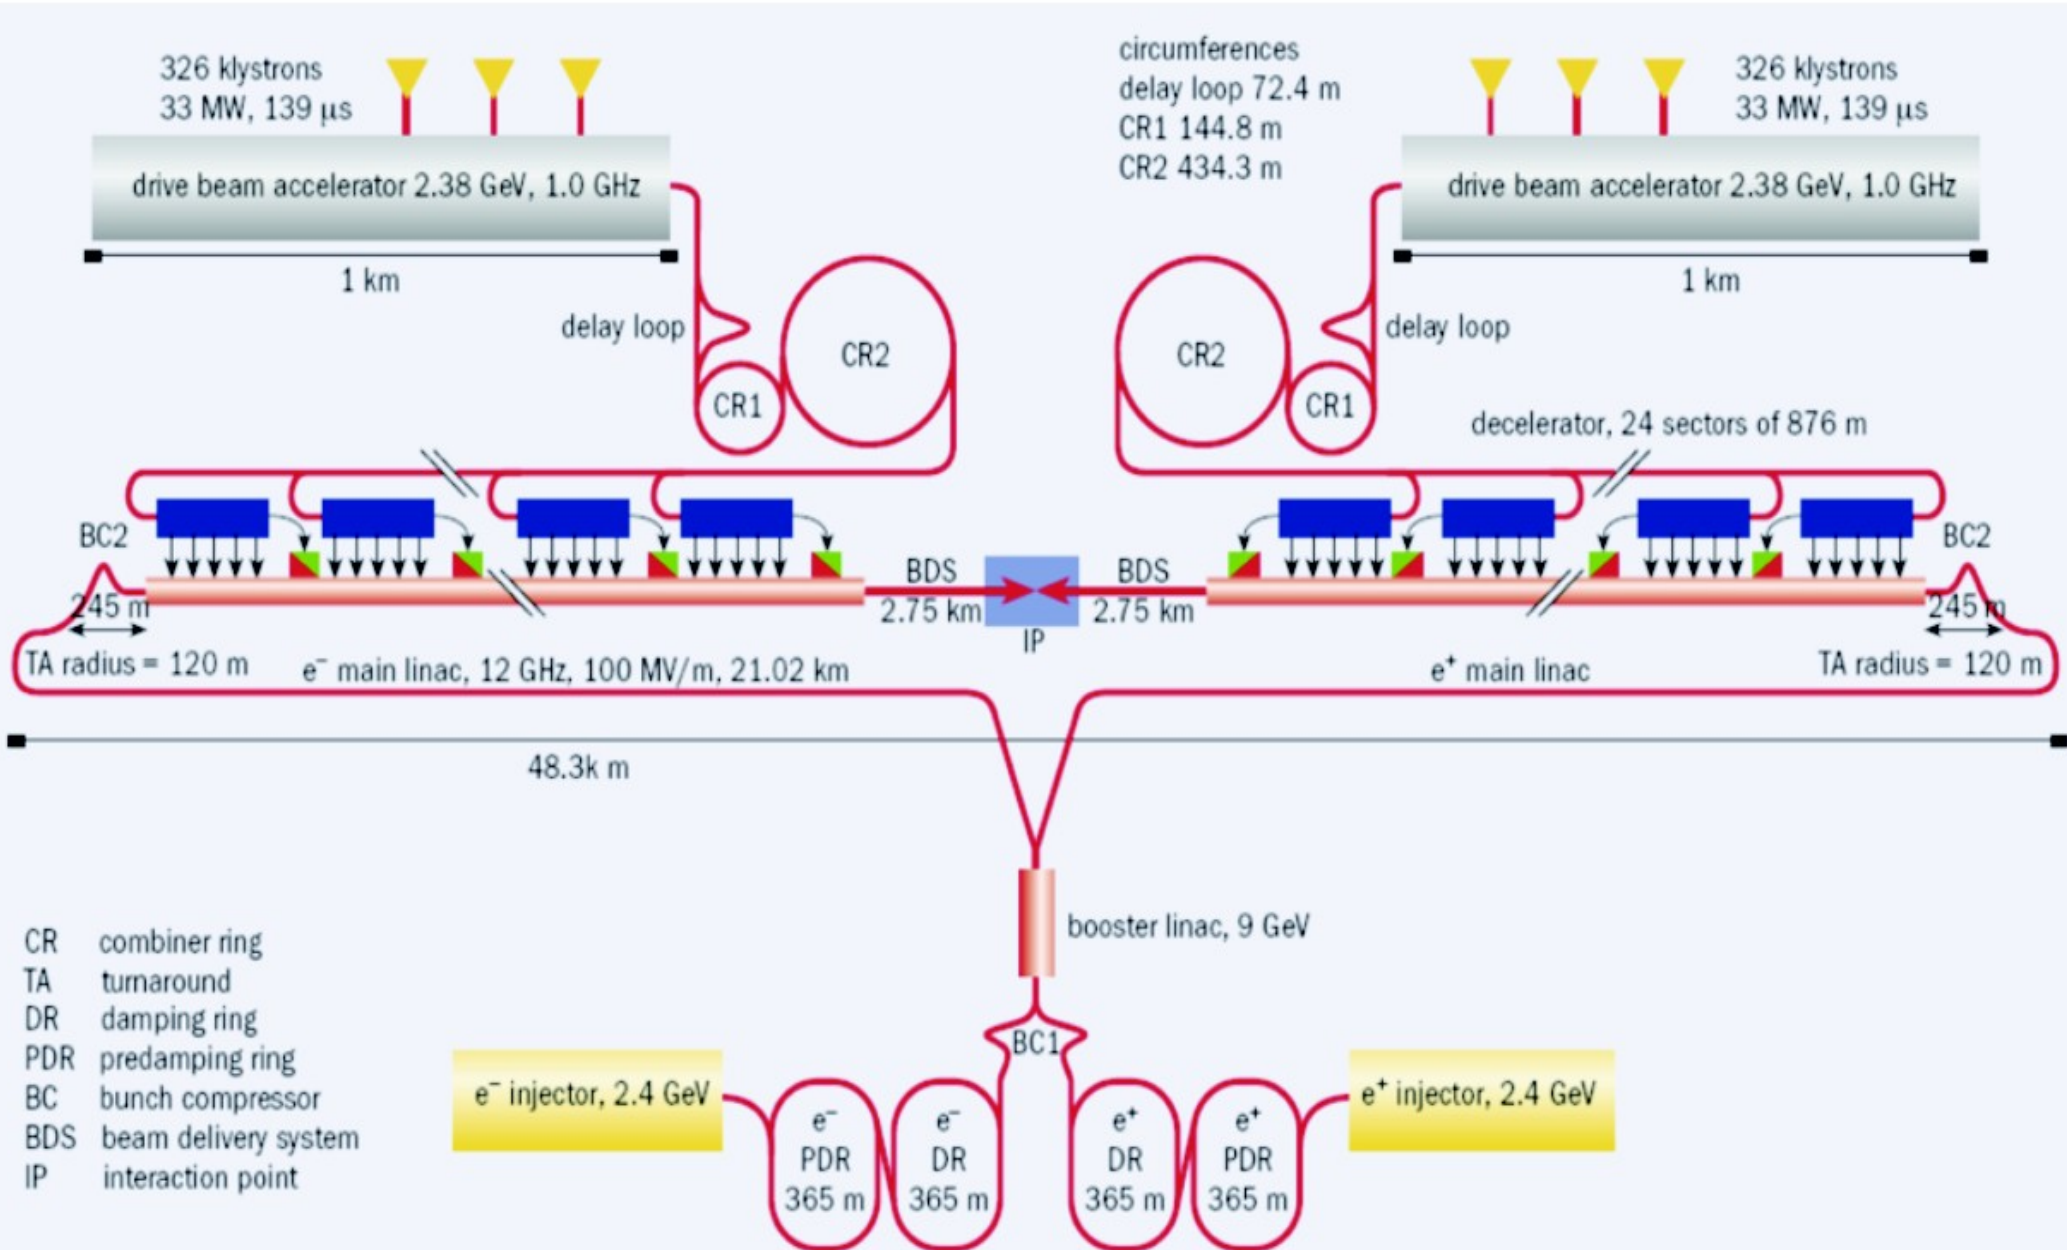

from E.Elsen



# Power Extraction and Transfer Structure (PETS)

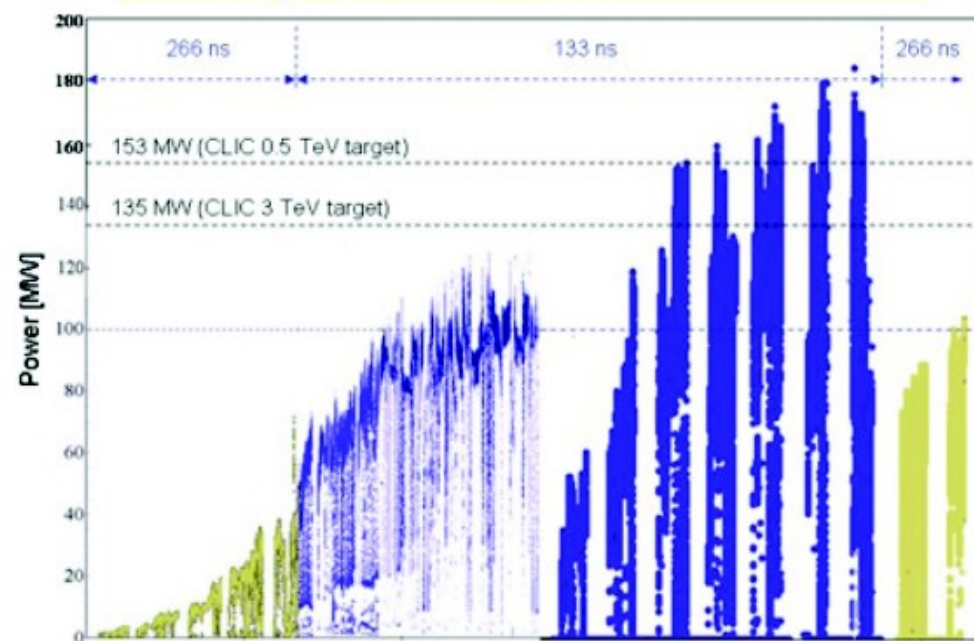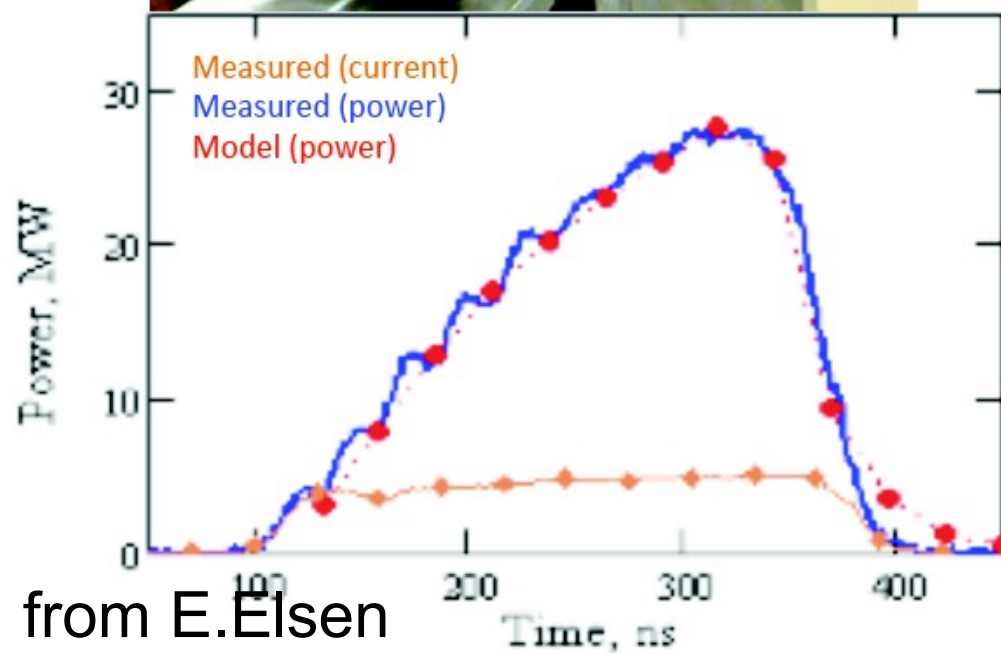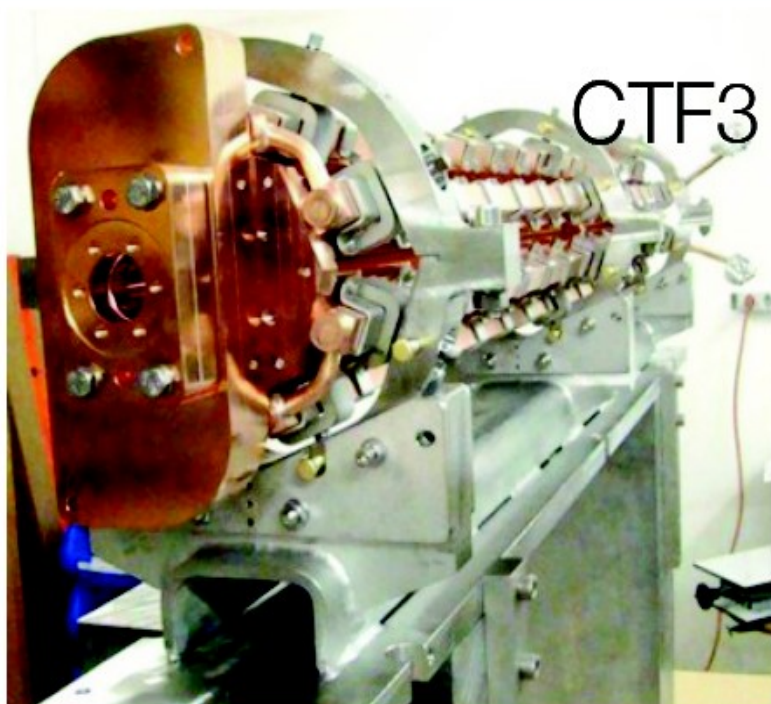

from E. Elsen


# Plasma Wakefield Accelerators

A revolutionary technology...

# Plasma Wakefield Accelerators

## Driving Beams:

- Laser
- electron beam
- proton beam

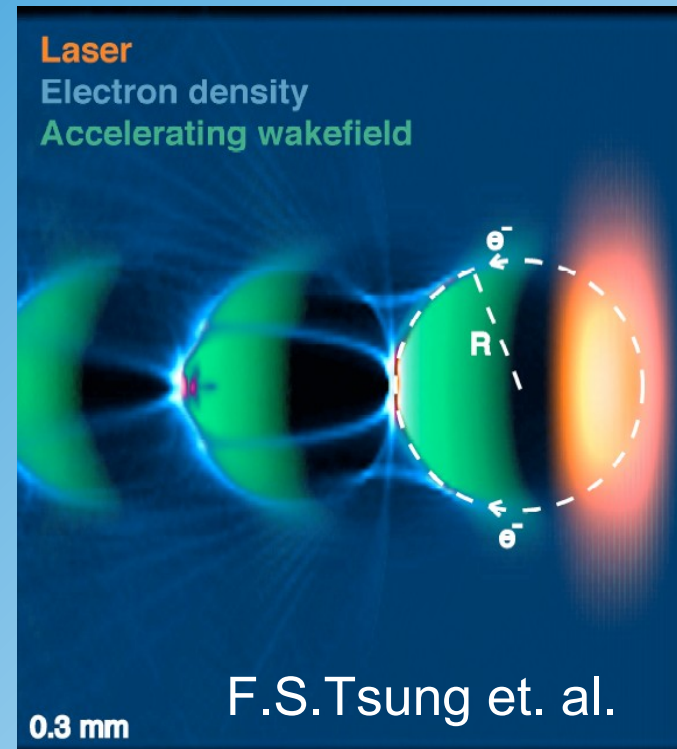


## E.g.: Proton Driven Plasma Wakefield Accerator:

Use 7 TeV LHC proton beam to transfer energy to an electron beam of 7 TeV or even higher, fantastic!

# Acceleration in Plasma

## Principle:

- Plasma is created either by using strong Lasers or by heating
- A (second) laser or a particle beam creates strong electric fields which lead to charge density fluctuations in the plasma
- The mobility of ions is given by its mass → electrons move
- Charge density fluctuation create strong fields which can be used for acceleration

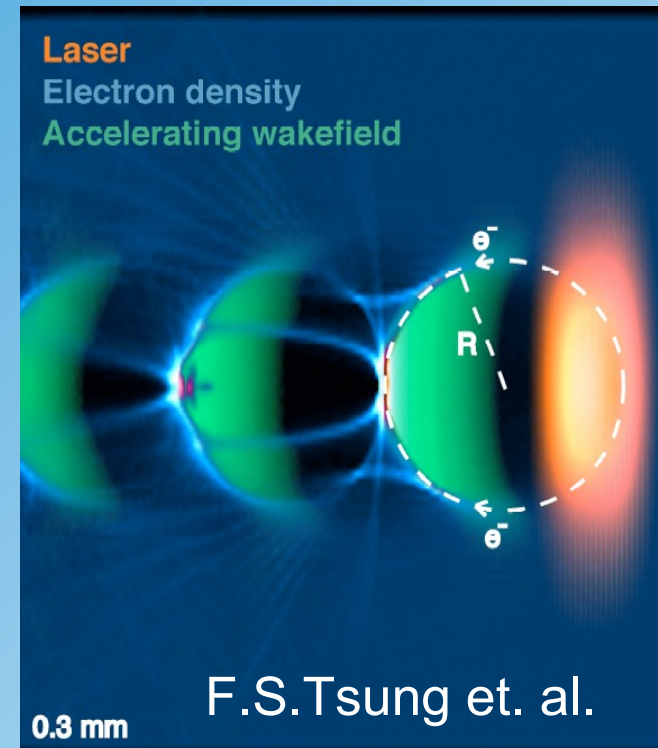

electrical field:

$$E_{field} = c \sqrt{\frac{m_e \rho}{\epsilon_0}}$$

density fluctuation


Plasma frequency:

$$\omega_p = c \sqrt{\frac{n_p e^2}{\epsilon_0 m_e}}$$

$n_p$  = plasma density

# Plasma Wakefield by Electron Beam

Sketch:

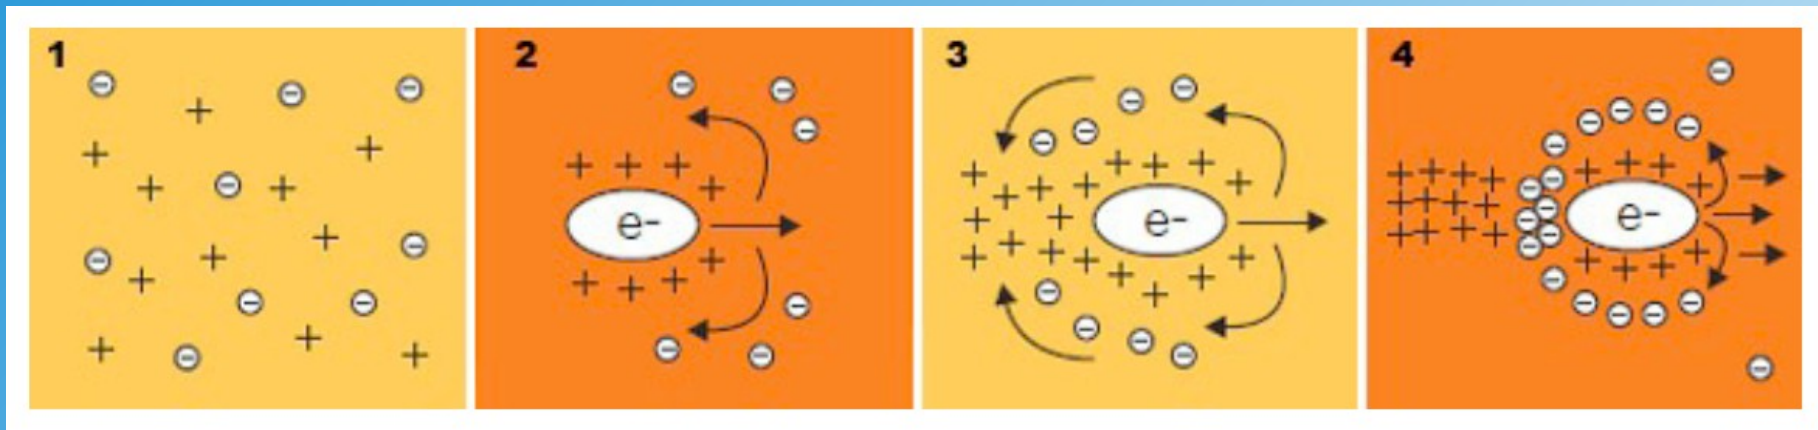



# Proton Driven Plasma Wakefield

Simulation (A.Caldwell et. al.):

electrical field

density fluctuation


long. E-field

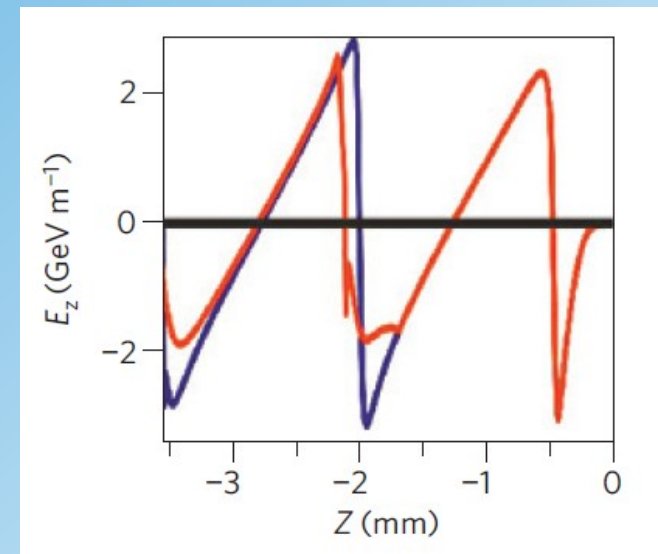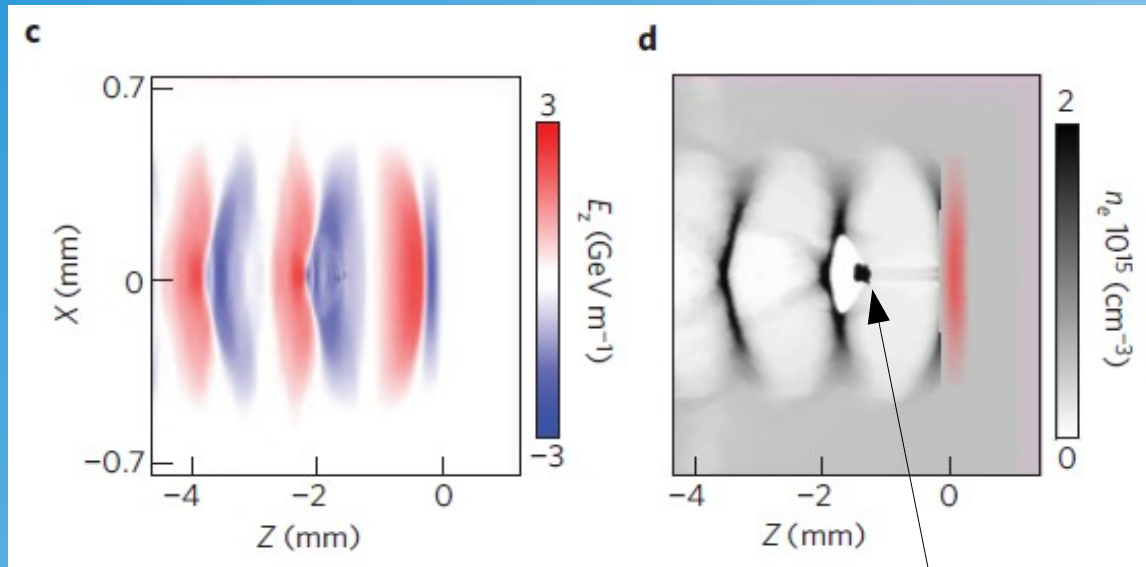

witness bunch!

**2 GeV/m !!!!**

# SLAC Result with Electron Beam:

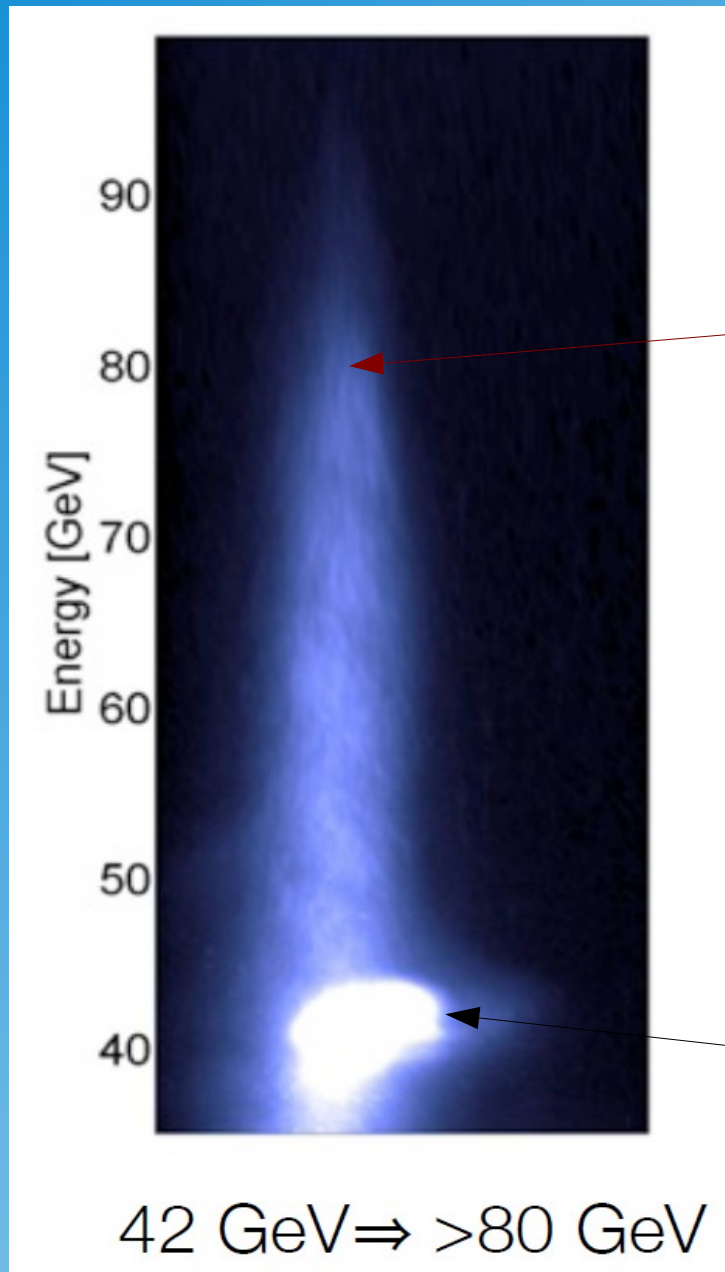


accelerated electrons

**energy more than doubled  
in plasma !**

driving beam


# Simulation of 1 TeV Proton Beam

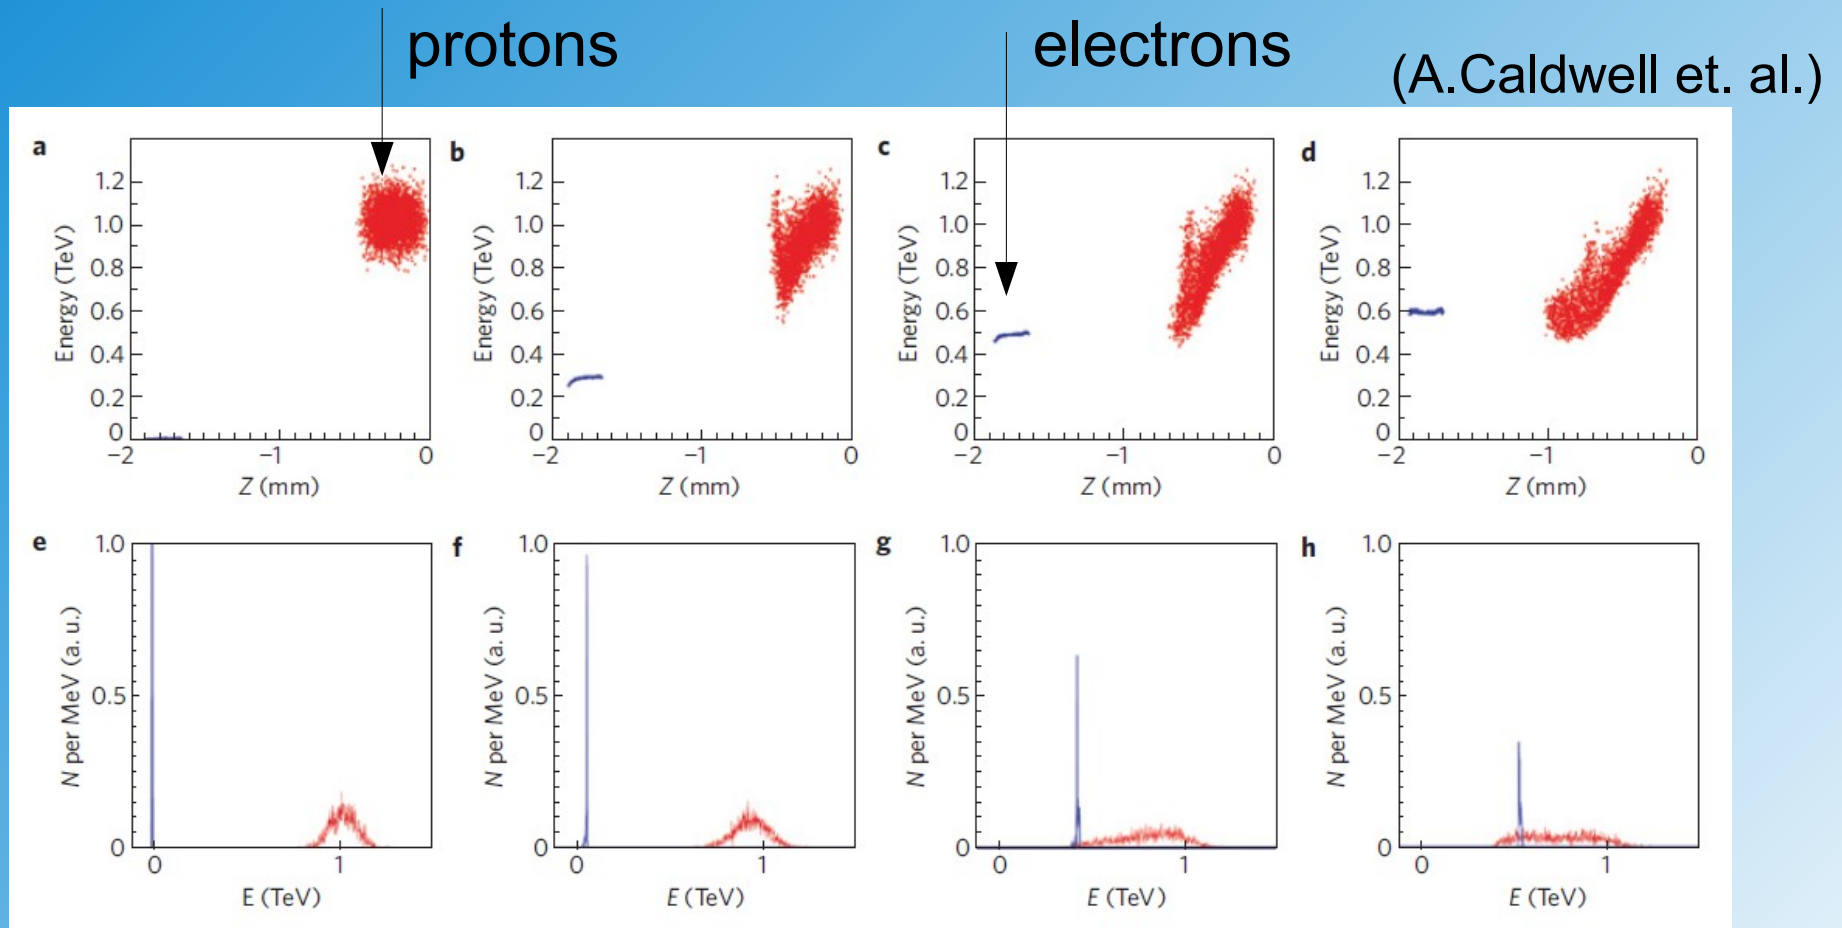

- Could be experimentally studied at SPS ( $E=450$  MeV)
- However, proton bunches are usually long  $\sim 10$ cm



# Microbunching and Self Modulation of Proton Beams

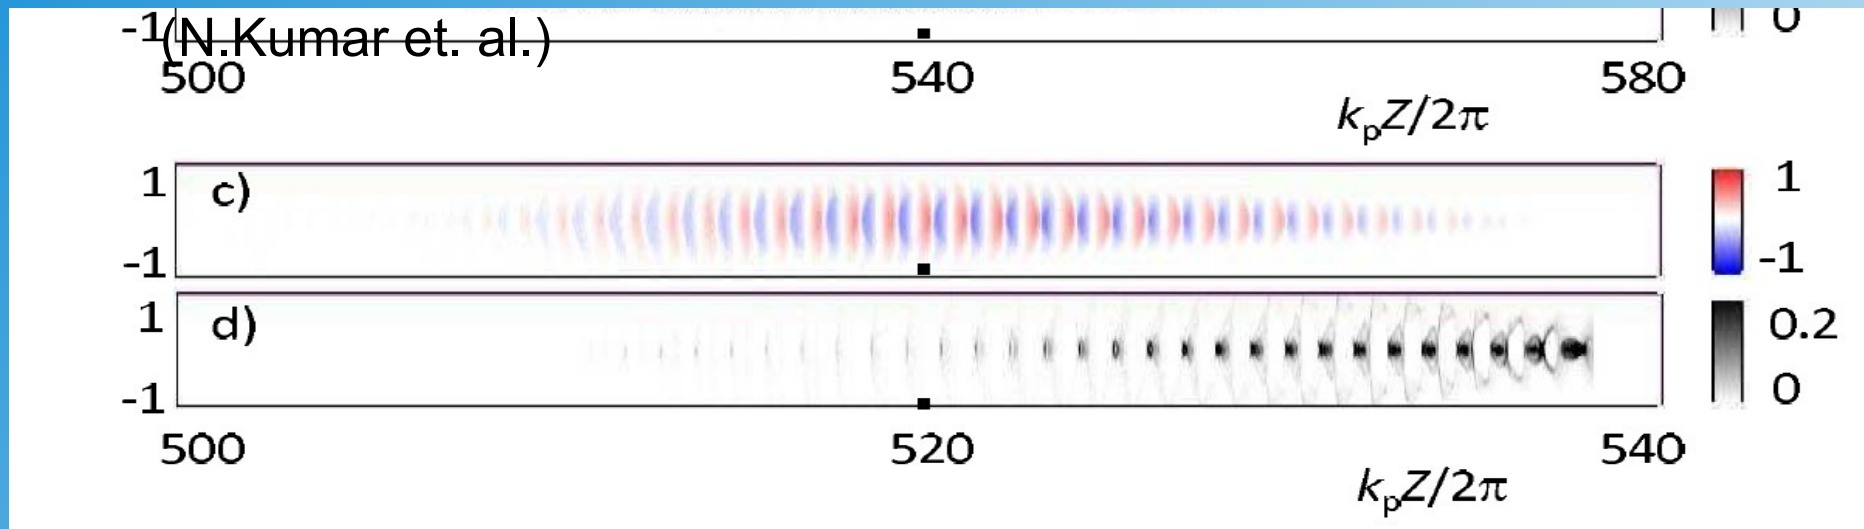

**red/blue** electrical field


**black** plasma density

plasma is also modulated using long proton bunches!

→ Self Modulation

# The Future: Proton Driven Plasma Accelerator at LHC?

A.Caldwell et al. Nature (2009)

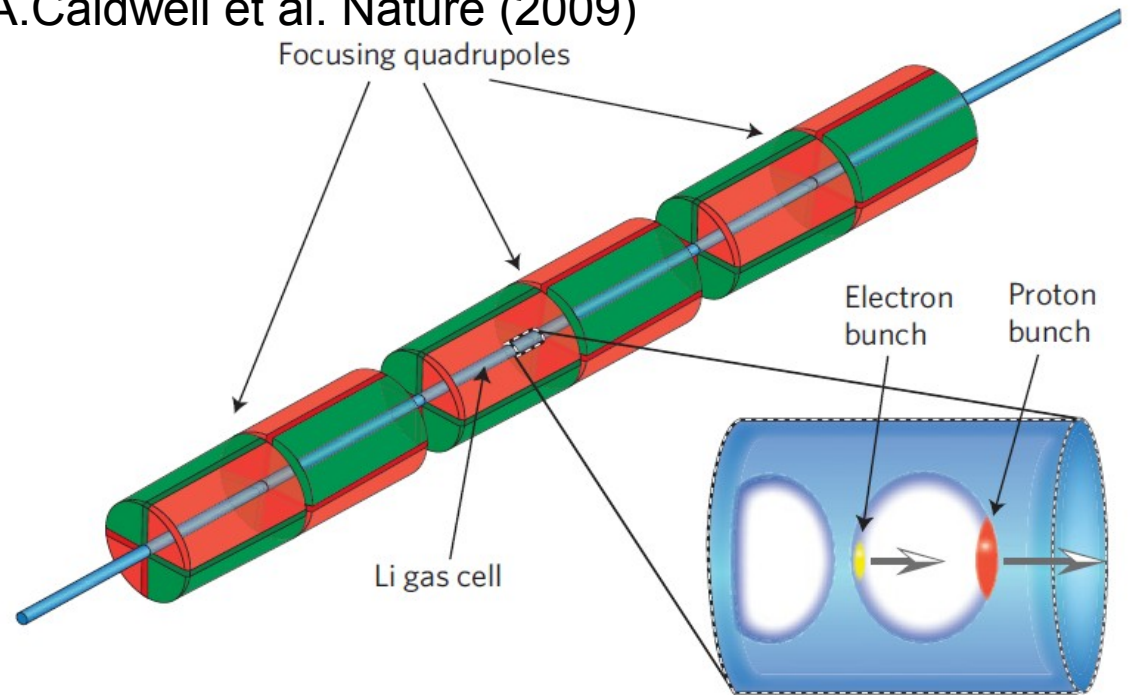

$$E = 240(\text{MV m}^{-1}) \left( \frac{N}{4 \times 10^{10}} \right) \left( \frac{0.6}{\sigma_z(\text{mm})} \right)^2$$

$$R = \frac{E_{\text{max}}^{\text{witness}}}{E_{\text{max}}^{\text{drive}}} \leq 2 - \frac{N_{\text{witness}}}{N_{\text{drive}}}$$

1km linear TeV accelerators with large acceleration gradients are possible, in principle!

